


SMARTLOCK®

INNOVATIVE H-AC/R FITTINGS FOR
REFRIGERATION LINES

NO BRAZING NO FLARING NO LEAKING
METAL TO METAL
SEALING TECHNOLOGY

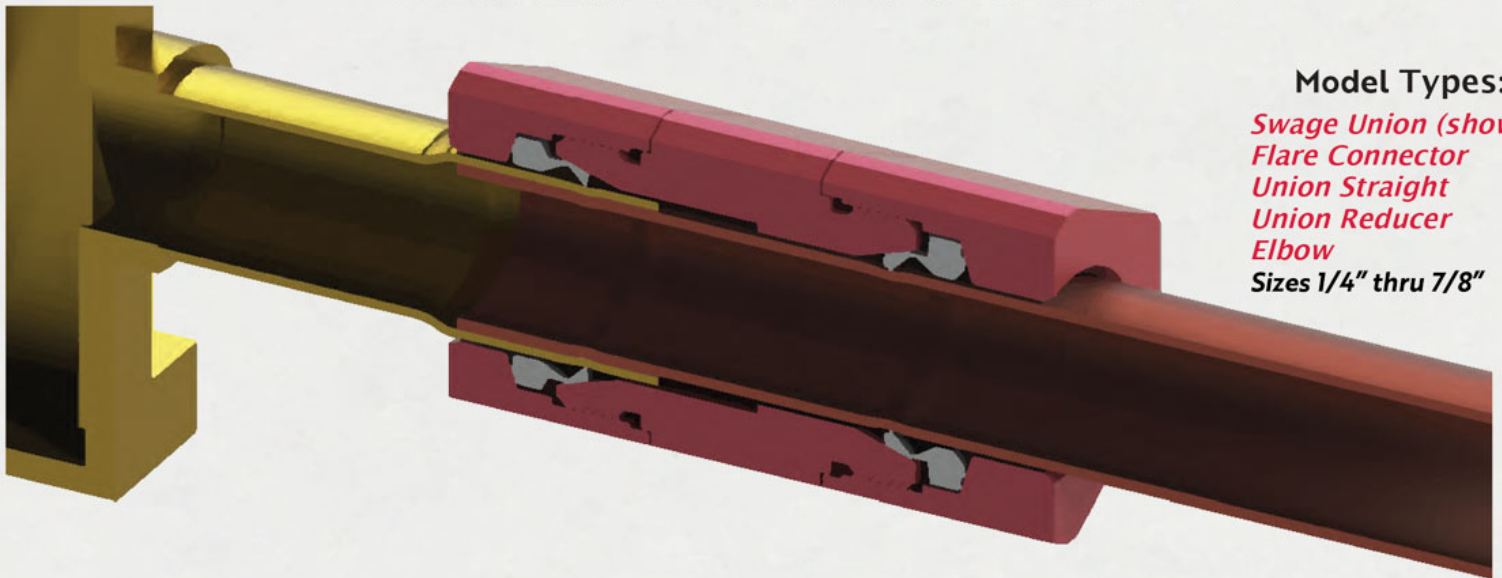

Model Types:
Swage Union (shown)
Flare Connector
Union Straight
Union Reducer
Elbow
Sizes 1/4" thru 7/8"

ELASTOMERS DO NOT SEAL THE REFRIGERANT - VIBRATION DAMPERS; DUST & MOISTURE EXCLUDERS

Easy Installation...

PUSH, PEEL, LOCK, TIGHTEN, CHECK.

...Reduces your labor cost and installation time


TUBE MATERIAL COMPATIBILITY



CU + AL



CU + CU



AL + AL

HIGH PRESSURE QUICK CONNECTION

— Design Pressure Range —
1/4" -1700psig to 7/8" -960psig

— High Temperatures —
-40C to -150C (-40F to -302F)

USABLE ON ALL REFRIGERANTS

www.smartlockfitting.com

